


■ GENERAL DESCRIPTION

With the ever increasing demand for high temperature survivability components, FOURMOST has designed a family of standard Measurement While Drilling (MWD) harsh environment harnesses. All components in the harnesses are OEM rated to a minimum of 200°C (392°F) to ensure survivability in today's harshest drilling environments. The Gamma Top Harness is fully compatible with gamma modules that have CBG or compatible units installed.

■ FEATURES

- Assembled entirely with components OEM rated to 200°C (392°F).
- Every Kintec connector is tested to 20,000 PSI.
- Protective sheathing adds an extra layer of durability to the harness.
- Clear potting allows for visual inspection of wire solder joints.
- Added cable support eliminates flexing near pinch points during assembly.

■ DIMENSIONS [inches]

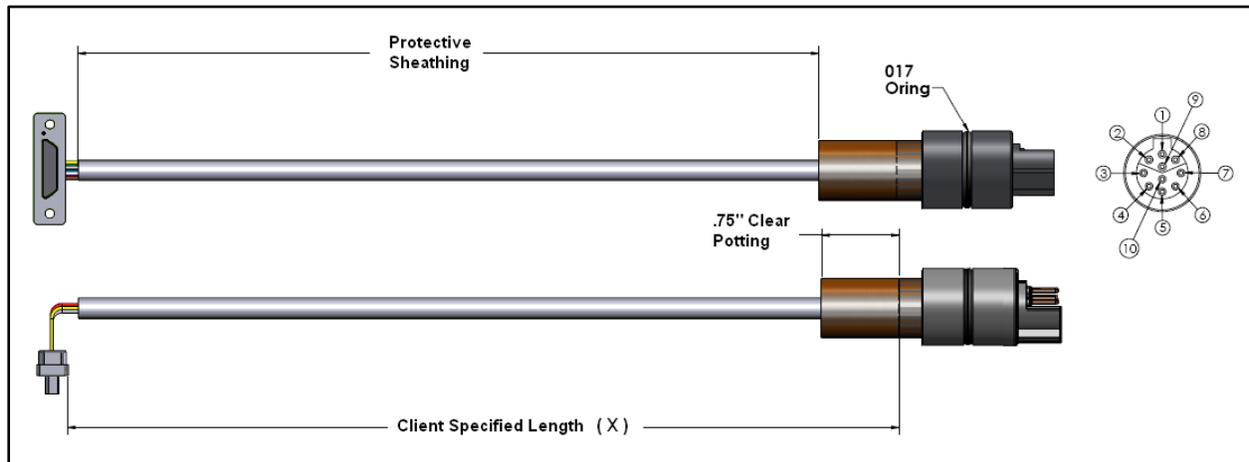

■ ORDERING INFORMATION

00 – 00009 – 0 /

7 – Harness Only 9 – Harness w/ Chassis	Operating Temperature Range: 1 - -45°C to +200°C 2 - -45°C to +175°C	Length (X) in inches. Format YY.Y inches.
--	---	--

**CALL US WITH YOUR CUSTOM HARNESS REQUIREMENTS AT 403-705-0460
OR EMAIL US AT INFO@4MOST-TECHNOLOGY.COM**